TECHNICAL SPECIFICATIONS

KURZ INSTRUMENTS INC.

Multipoint Insertion Flow Meter
Series K-BAR 2000B

The Kurz K-BAR 2000B multipoint insertion flow meter for combustion control and emissions monitoring includes the qualities and features found in all Kurz constant temperature thermal flow meters that make them outperform all other currently available thermal mass flow meters, including:

- Ideal for large stacks and ducts with non-uniform velocity profiles
- The highest repeatability, accuracy, and reliability available
- The fastest response to temperature and velocity changes in the industry
- Capable of reading low flows that occur during start-up, shut-down, or obstruction events
- Easy installation and no maintenance
- Sensors are resistant to dirt and corrosion
- Individual sensor optimization for flow profile variations
- Interchangeable sensor and electronics — no matched sets
- Continuous self-monitoring electronics that verify the integrity of sensor wiring and measurements
- Constant temperature thermal technology
- Sensors do not overheat at zero flow by using a unique constant temperature control method and power limiting design
- Zero velocity as a valid data point
- Completely field configurable using the local user interface or via a computer connection
- User-programmable dual gas mix interpolation
- User-programmable correction factors to compensate for velocity-dependent profile shifts
- Velocity-temperature mapping for wide ranging velocity and temperature
- Supports HART, Profibus DP, and Modbus communication protocols
- Patented digital sensor control circuit (US 7,418,878)

Kurz Instruments is dedicated to manufacturing and marketing the best thermal mass flow meters available and to support our customers in their efforts to improve their businesses.

Applications

Primary, secondary, tertiary & overfire air
Stack & flue gas
Flare gas
Boilers & recovery boilers
Coal pulverizer air
EPA & AMS emissions monitoring

Kurz Instruments, Inc.
2411 Garden Road
Monterey, CA 93940
800-424-7356
www.KurzInstruments.com

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

SPECIFICATIONS

- **Velocity range**
  0 to 12,000 SFPM (56 NMPS)
- **Velocity (v) accuracy**
  (SFPM at laboratory conditions)
  ± (1 + 2000/v) % of reading
- **0.25% reading repeatability**
- **Velocity time constant**
  1 second for velocity changes at 6,000 SFPM (constant temp)
- **Process temperature time constant**
  8 seconds for temp changes at 6,000 SFPM (constant velocity)
- **Velocity angle sensitivity**
  < 2% per degree angle up to ±20°
- **Velocity-dependent correction factors for flow rate**
- **Electronics operating temperature**
  -40ºF to 149ºF (-40ºC to 65ºC)

PROCESS CONDITIONS

- **Process pressure rating**
  Up to 150 PSIG (10 BARg)
- **Process temperature rating**
  -40ºF to 500ºF (-40ºC to 260ºC) (HT)
  -40ºF to 932ºF (-40ºC to 500ºC) (HHT)
  The process temperature should not exceed the ambient temperature rating for the temperature code of the installation.

APPROVALS

- **IECEx, ATEX, cETLus approvals for Explosive Atmospheres**
  IEC / EN / UL / CSA C22.2 / 60079-0
  IEC / EN / UL / CSA C22.2 / 60079-7
  II 3 G, Ex ec IIC T4...T1 Gc
  Class I, Div. 2, Group A, B, C, and D
  T-Class T4 -40ºF to 122ºF (-40ºC to 50ºC)
  T-Class T3 -40ºF to 239ºF (-40ºC to 115ºC)
  T-Class T2 -40ºF to 419ºF (-40ºC to 215ºC)
  T-Class T1 -40ºF to 689ºF (-40ºC to 365ºC)
- **EPA mandatory GHG certification**
  40 CFR 98.34(c)(1)
- **Alarm output conformity**
  NAMUR NE43
- **CE compliance**
  EMC, LVD, PED, QAL1 (as part of a complete Kurz AMS solution), ROHS, and WEEE

TRANSMITTER FEATURES

- **Two optically-isolated loop powered 4-20 mA outputs**
  12-bit resolution and accuracy
  Maximum loop resistance is 300Ω at 18 VDC, 550Ω at 24 VDC, 1400Ω at 36 VDC
- **One 4-20mA non-isolated analog input**
- **Input power**
  1 Amp per sensor, DC (21.6-26.4 V)
- **Two optically isolated solid-state relays / alarms**
  Configurable as alarm outputs, pulsed totalizer output, or air purge cleaning
- **Two digital inputs dedicated to purge and zero-mid-span drift check**
- **Enclosure**
  Three enclosure options for application and/or area classification
- **Velocity-dependent correction factors for flow rate**
- **Built-in zero-mid-span drift check**
- **Built-in flow totalizers and elapsed time**
- **User-configurable digital filtering from 0 to 600 seconds**
- **Configuration/data access**
  USB or RS-485 Modbus (ASCII or RTU)
- **Meter memory**
  200 recent events, top 20 min/max, and 56 hours (10 second samples) of trends
- **3-year warranty**

SUPPORT & ELEMENT COMPONENTS

- **Sensor material**
  C-276 alloy all-welded sensor construction (standard)
- **Sensor support**
  316L stainless steel (standard)
  Hastelloy® C-22® alloy (optional)
- **Sensor support diameter**
  Segment 1 — 1½" tubing (standard)
  Segment 2 — 2½" (Sch.10)
  Segment 3 — 4" (Sch 10)
- **Sensor support length**
  Maximum length based on supported or self-supporting design and the number of sensors
- **Mounting flange**
  Raised face Class 150 ANSI B16.5
- **3-year warranty**

OPTIONS

- **Enclosure Options**
  Two styles for Hazardous Locations
  One style for General Industrial (non-hazardous location)
- **Communication protocols**
  HART (v7 FSK) and PROFIBUS DP
- **Hardware accessories**
  Available hardware includes flange mounting assemblies, ball valves, conduit seals, cable, and packing glands
- **SIL1 certification**
  via TUV Rheinland

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

K-BAR DESIGN

All K-BARs include the flange-to-inside-wall (FTIW) measurement when determining the length of the probe support.

The K-BAR can be a supported or self-supporting structure.

- A supported K-BAR has an external or internal support cup on the wall opposite the mounting flange. A supported K-BAR allows for a smaller flange and a consistent 1.5" probe support across the width of the stack/duct. A supported probe support with 2, 3, or 4 sensors can be up to 173" (including the FTIW distance).

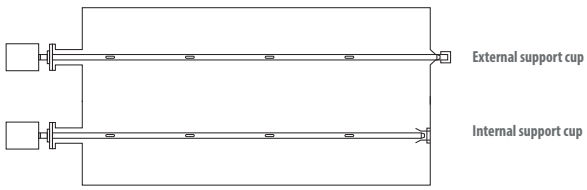

- A self-supporting K-BAR, depending on the length, can have up to three support probe sections that reduce in diameter toward the probe support tip. In addition, the number of sensors is a factor in determining the maximum probe support length.
  - One segment = 1.5", stack/duct up to 302 inches
  - Two segments = 2.875", 1.5", stack/duct up to 488 inches
  - Three segments = 4.5", 2.875", 1.5", stack/duct up to 460 inches

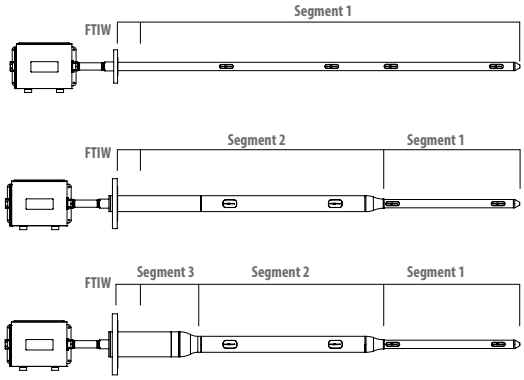

Note: The additional material used to increase the diameter of segments 2 and 3 also slows the effects of corrosion on the probe support.

HALF SPAN AND FULL SPAN

Using a supported or self-supporting K-BAR is determined by several factors:

- The dimensions of the stack or duct
- The accessibility of an installation location
- The flow profile of the stack or duct
- Excessive vibration

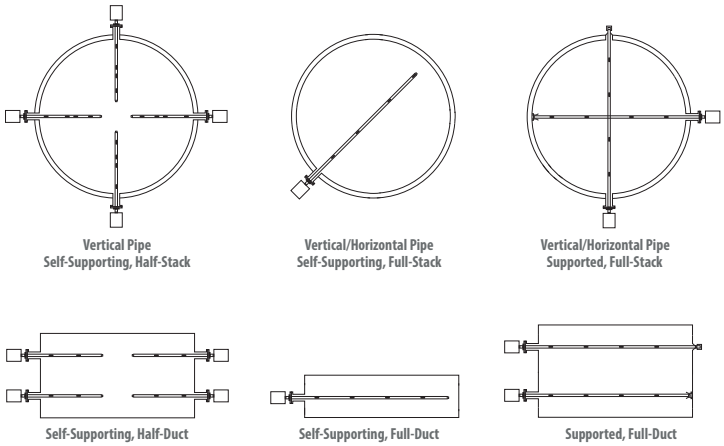

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

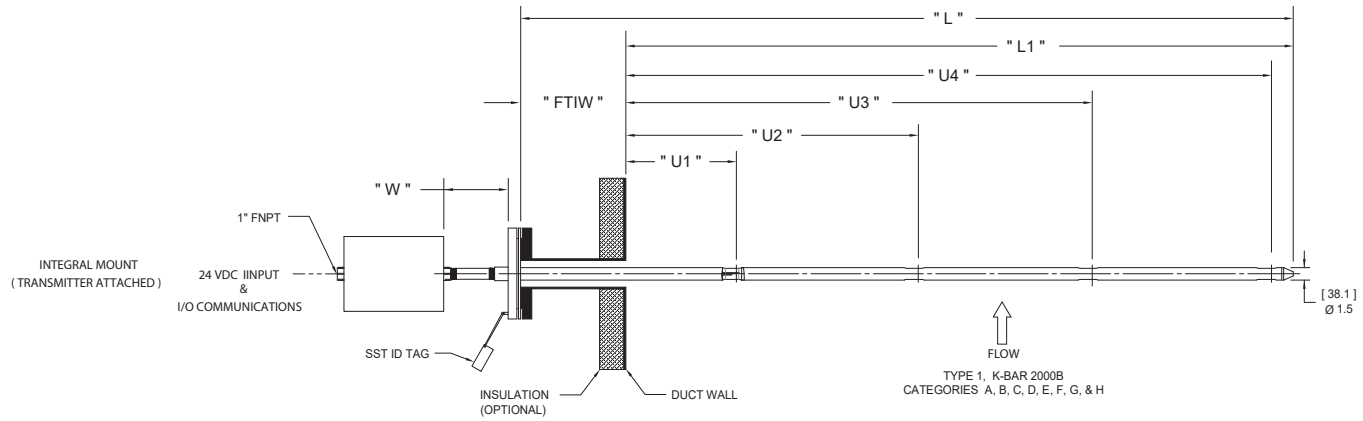

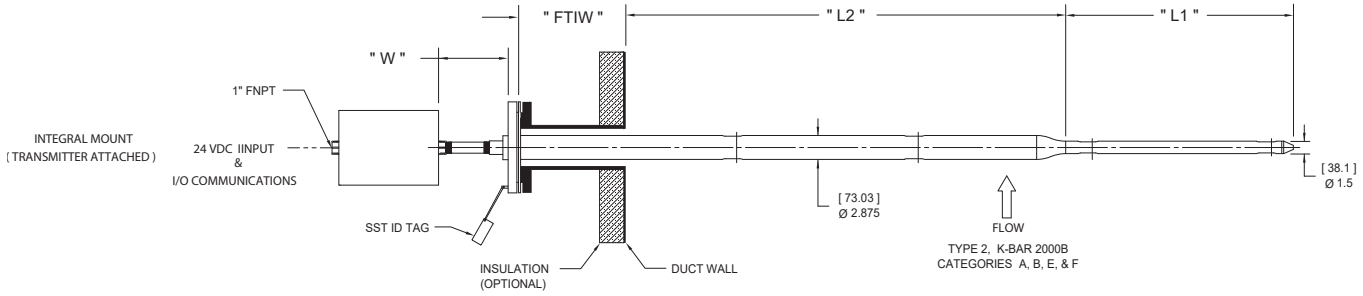

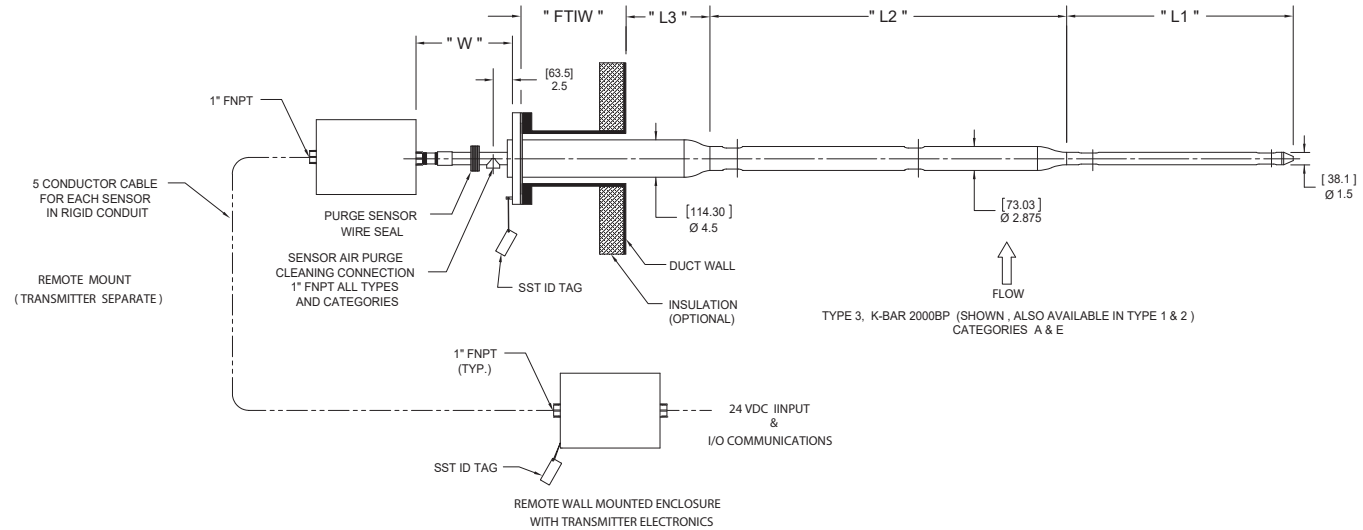

Identifier	Description
D	The round stack/duct diameter or rectangular stack/duct flow inside dimension (inches).
FTIW	The flange-to-inside wall measurement for determining the overall length of the probe support includes gaskets, flanges, and stack/duct wall thickness.
Integral Mount	The electronics are in an enclosure mounted on the probe.
Remote Mount	The electronics are in an enclosure mounted separately from the probe.
Dimensions	All dimensions are in inches with millimeters in brackets.

For enclosure dimensions and ratings see Page 5.

Identifier	Description
L_1	Length of segment #1 (inches).
L_2	Length of segment #2 (inches).
L_3	Length of segment #3 (inches).
L	Total length (inches) of K-BAR probe support ($L_1 + L_2 + L_3$ + FTIW).
U_1	Location of first sensor from inside wall of stack/duct.
U_2	Location of second sensor from inside wall of stack/duct.
U_3	Location of third sensor from inside wall of stack/duct.
U_4	Location of fourth sensor from inside wall of stack/duct.
W	HT=7.5", HHT=13.5", PB-HT (purge)=12"

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

K-BAR Enclosure Options

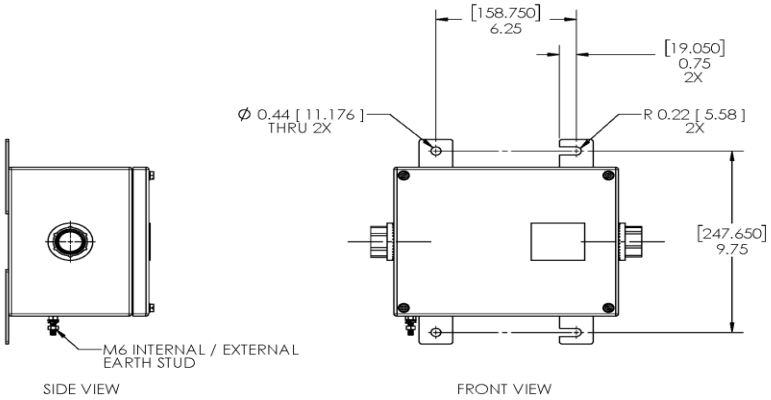

316L Stainless Steel NEMA 4X, IP66, for Hazardous Locations

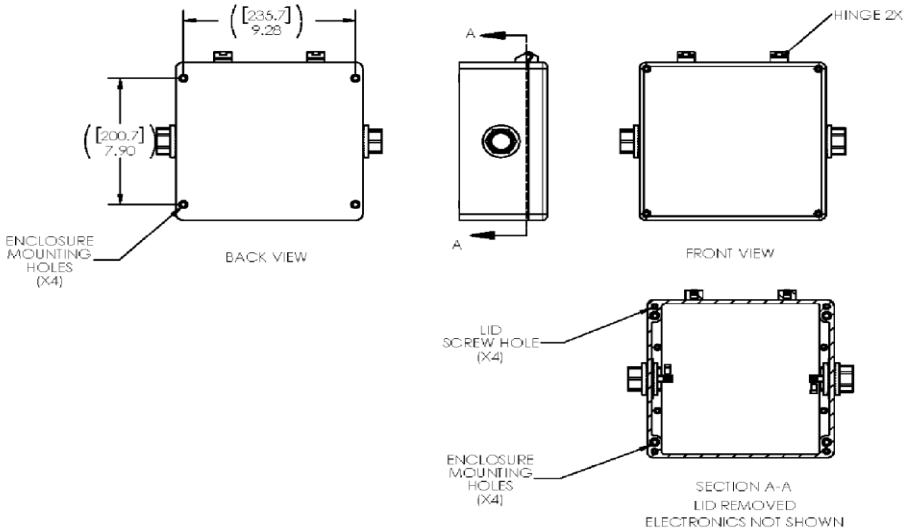

Polyester NEMA 4X, IP66, for Hazardous Locations

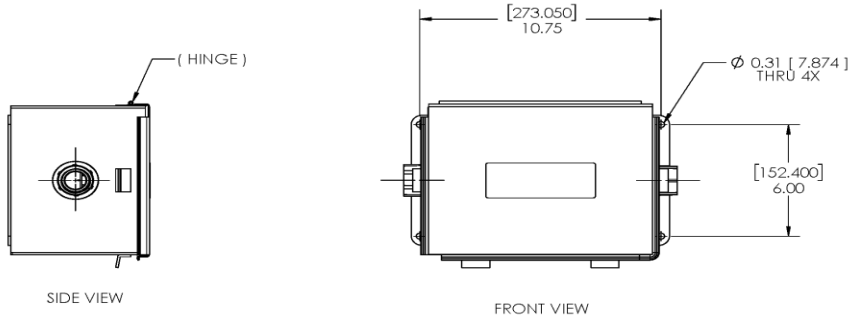

Steel NEMA 4, IP65, for General Industrial

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

Typical Installation Setup

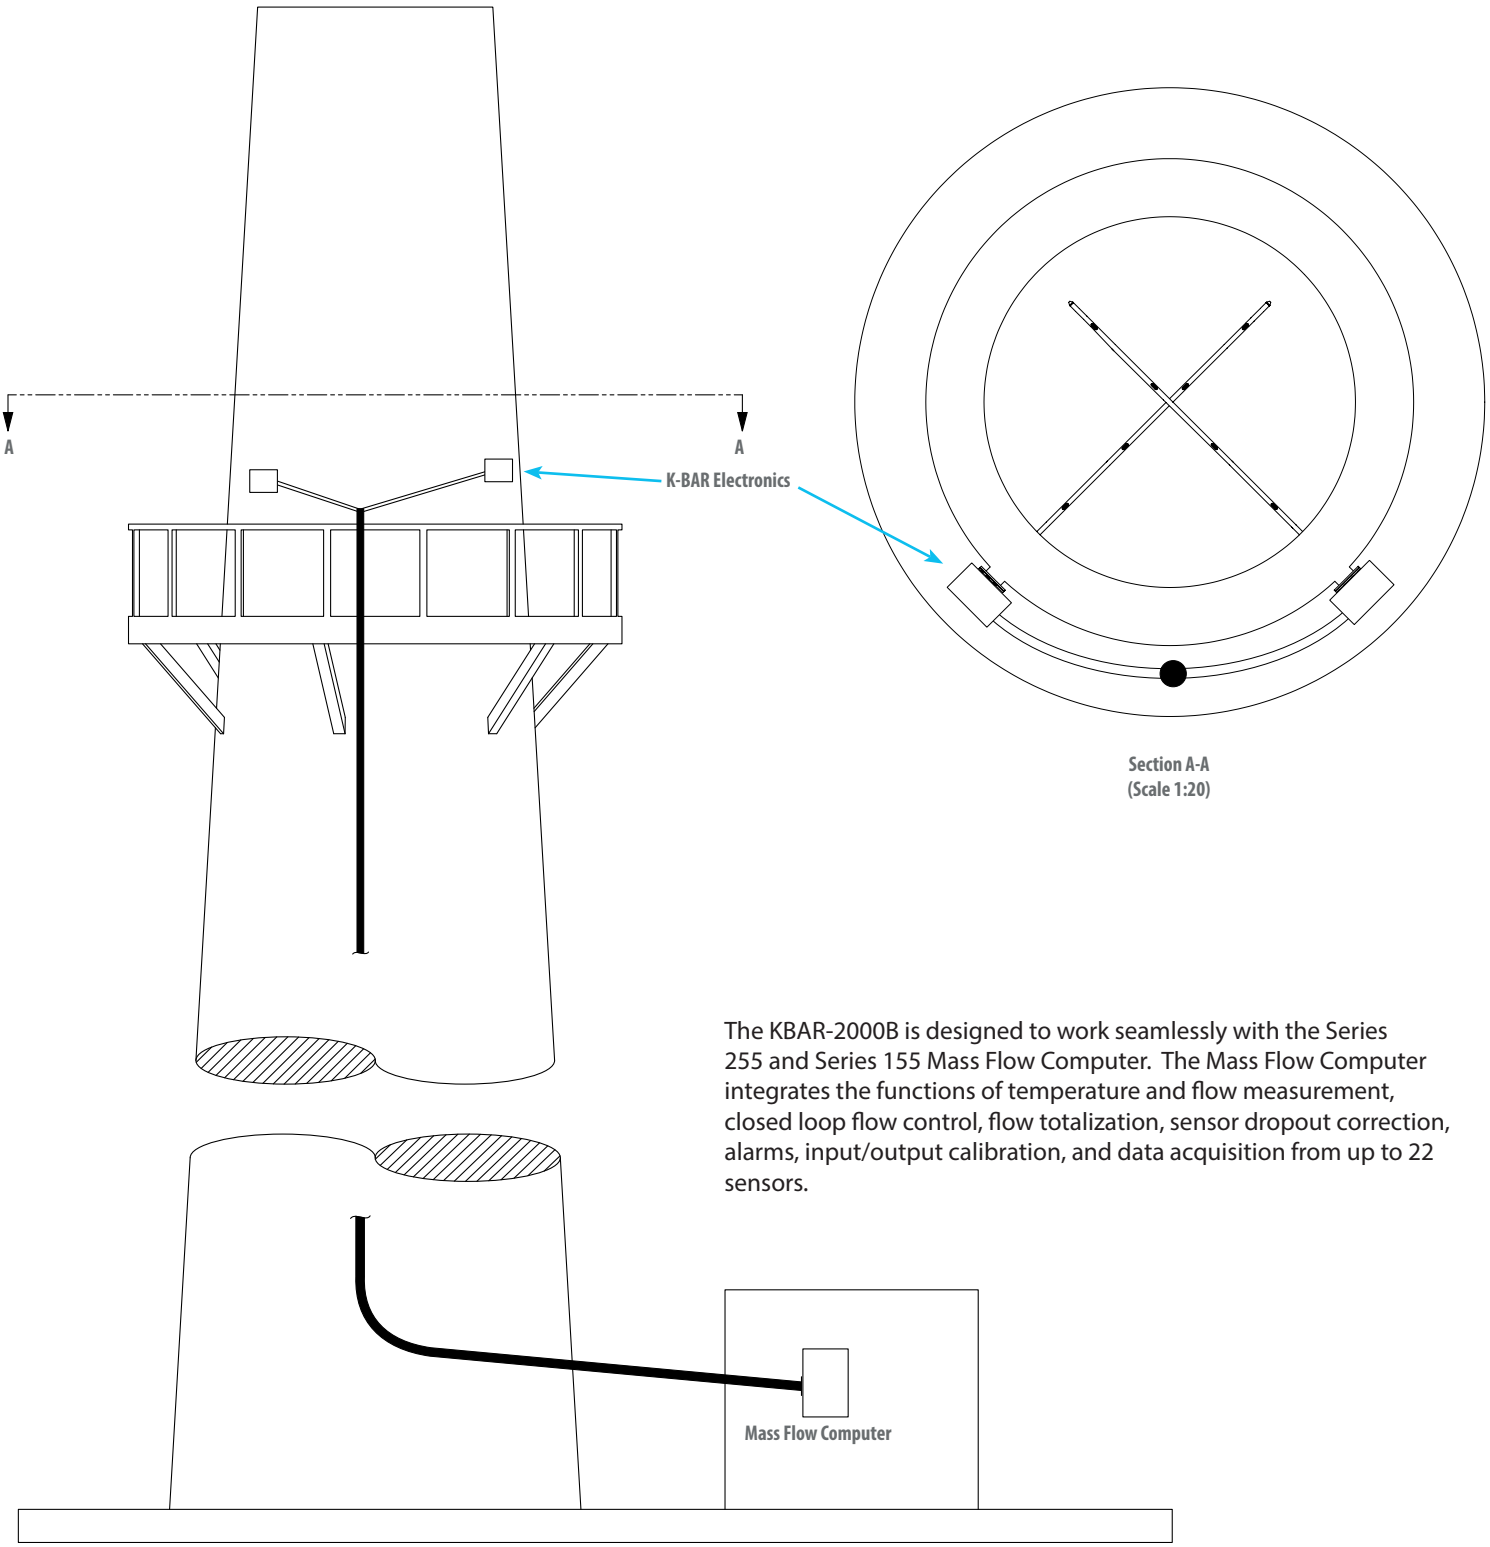

Section A-A
(Scale 1:20)

The KBAR-2000B is designed to work seamlessly with the Series 255 and Series 155 Mass Flow Computer. The Mass Flow Computer integrates the functions of temperature and flow measurement, closed loop flow control, flow totalization, sensor dropout correction, alarms, input/output calibration, and data acquisition from up to 22 sensors.

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

753 _ _ _	_	_ _ _ _	_ _ _	_	_	_ _ _	_	_ _	_	_	_	_ _ _ _
Parent number	F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12

Parent Number	Model
753731	K-BAR 2000B-HT (-40ºF to 500ºF / -40ºC to 260ºC)
753732	K-BAR 2000B-HHT (-40ºF to 932ºF / -40ºC to 500ºC)
753733	K-BAR 2000PB-HT with Purge feature (Type 1 only)

F1	Option	K-BAR Installation Configuration Category
	A	Category A, round stack/duct, half span, single-end support, Type 1, 2, 3
	B	Category B, round stack/duct, full span, single-end support, Type 1, 2
	C	Category C, round stack/duct, full span, external end support, Type 1
	D	Category D, round stack/duct, full span, internal end support, Type 1
	E	Category E, rectangular stack/duct, half span, single-end support, Type 1, 2, 3
	F	Category F, rectangular stack/duct, full span, single-end support, Type 1, 2
	G	Category G, rectangular stack/duct, full span, external end support, Type 1
	H	Category H, rectangular stack/duct, full span, internal end support, Type 1

F2	Option	Stack/Duct Flow Dimensions (D)
	_ _ _ _	For round stacks/ducts, enter the inside diameter to the nearest tenth inch. For rectangular stacks/ducts, enter the inside diameter measured along the axis where the K-BAR will be installed to the nearest tenth inch. **Enter 4 digits.** For example, a round stack with 336 inch inside diameter is written as 3360.

F3	Electronics Enclosure Material, Rating & Area Approval	
	Option	**Electronics Enclosure Configuration (1st digit)**
	A	Directly attached electronics enclosure.
	B	Remotely attached electronics enclosure
	Option	**Probe Support Enclosure Material & Area Approval (2nd digit)**
	A	Steel powder-coated, General Industrial Safety, NEMA 4, IP65
	B	Polyester, Ex ec IIC T4 Gc, ATEX II 3 G , Class I Zone 2, Class I Div 2, Groups A, B, C, D, NEMA 4X, IP66, IK08
	C	Stainless Steel, Ex ec IIC T4 Gc, ATEX II 3 G , Class I Zone 2, Class I Div 2, Groups A, B, C, D, NEMA 4X, IP66, IK09
	Option	**Remote Electronics Enclosure Material & Area Approval (3rd digit)**
	X	Not applicable for directly attached electronics enclosure
	A	Steel powder-coated, General Industrial Safety, NEMA 4, IP65
	B	Polyester, Ex ec IIC T4 Gc, ATEX II 3 G , Class I Zone 2, Class I Div 2, Groups A, B, C, D, NEMA 4X, IP66, IK08
	C	Stainless Steel, Ex ec IIC T4 Gc, ATEX II 3 G , Class I Zone 2, Class I Div 2, Groups A, B, C, D, NEMA 4X, IP66, IK09

Notes: All enclosure options have 1" FNPT conduit hubs for field wiring.

IK Rating indicates degree of protection against external mechanical impacts according to IEC 62262 and IEC 60068.

Purge not available with hazardous location certification

F4	Option	K-BAR Construction Type
	1	One segment K-BAR and FTIW segment. All categories.
	2	Two segment K-BAR and FTIW segment. Category A, B, E, F.
	3	Three segment K-BAR and FTIW segment. Category A, E.

F5	Option	Communications and Inputs/Outputs	
	C	Full	Two 4-20mA isolated outputs, two relays, two digital inputs, one non-isolated 4-20mA input
	E	HART-1	One 4-20mA isolated output, two relays, two digital inputs, one non-isolated 4-20mA input
	H	HART-2	Two 4-20mA isolated outputs, two relays, two digital inputs, one non-isolated 4-20mA input
	K	Profibus DP	Two 4-20mA isolated outputs, two relays, two digital inputs, one non-isolated 4-20mA input

F6	Option	Flange-To-Inside Wall Length (FTIW)
	_ _ _	Enter the length from the mating surface of the K-BAR mounting flange to the inside wall of the stack/duct to the nearest tenth inch. This measurement includes the gasket thickness and stack/duct wall thickness. **Enter 3 digits.** For example, the distance between the stack mounting flange and inside wall of the stack/duct (including gasket and wall thickness) is 56.25 inches and written as 563.

F7	Option	Process Temperature Compensation
	A	Standard temperature compensation (STC) over process temperature range from -40°C to 125°C. Accuracy: ± (1 + 2000/V) %, where V = SFPM, @ 25°C.
	B	Standard temperature compensation (STC) over process temperature range from 0°C to 260°C. Accuracy: ± (2 + 2000/V) %, where V = SFPM, @ 125°C.
	C	Velocity temperature mapping (VTM) with data sets over process temperature range from 0°C to 260°C. Accuracy: ± (2 + 2000/V) %, where V = SFPM.
	D	Velocity temperature mapping (VTM) with data sets over process temperature range from 0°C to 500°C. Accuracy: ± (3 + 3000/V) %, where V = SFPM.

F8	Sensors & Sensor Material	
	Choose one option from each category.	
	Option	**Number of Sensors (first digit)**
	1	One
	2	Two
	3	Three
	4	Four
	Option	**Sensor Material (second digit)**
	3	C-276 alloy
	7	C-276 alloy with abrasion-resistant aluminum titanium nitride (AlTiN) coating

more on next page

2411 Garden Road • Monterey, CA 93940 | 800-424-7356 • 831-646-5911 | www.KurzInstruments.com

F9	Option	Mounting Flange Size (CL150) & Thickness		
	H	1.5″	(Type 1)	0.69″
	J	2″	(Type 1)	0.75″
	L	2.5″	(Type 1, 2)	0.88″
	N	3″	(Type 1, 2)	0.94″
	Q	3.5″	(Type 1, 2)	0.94″
	S	4″	(Type 1, 2)	0.94″
	U	6″	(Type 1, 2, 3)	1.0″

F10	Option	Mounting Flange Material
	2	316L stainless steel
	3	C-276 alloy

F11	Option	Laboratory Air Velocity Calibration	
	A	300 SFPM	(1.4 NMPS)
	C	600 SFPM	(2.8 NMPS)
	E	1,000 SFPM	(4.7 NMPS)
	G	2,000 SFPM	(9.3 NMPS)
	I	3,000 SFPM	(14 NMPS)
	K	4,000 SFPM	(18.6 NMPS)
	M	6,000 SFPM	(28 NMPS)
	P	9,000 SFPM	(41.9 NMPS)
	R	12,000 SFPM	(56 NMPS)

F12	Segment Material
	Choose one option from each category.

Option	Segment #1 Material (first digit)	
2	316L SS tube / 316L SS windows	(Type 1, 2, 3)
3	C-22 alloy tube / C-276 alloy windows	(Type 1)
6	C-22 alloy tube / 316L SS windows	(Type 1)

Option	Segment #2 Material (second digit)	
0	No segment 2	(Type 1)
2	316L SS pipe / 316L SS windows	(Type 2, 3)

Option	Segment #3 Material (third digit)	
0	No segment 3	(Type 1, 2)
2	316L SS pipe	(Type 3)

Option	FTIW Segment Material (fourth digit)	
2	316L SS pipe	(Type 1, 2, 3)
3	C-22 alloy tube C-276 alloy pipe	(Type 1) (Type 2, 3)

Notes: Available configurations are 2002, 3003, 6003, 2202, 2203, 2222, and 2223.

Add the letter "S" to the end of Feature 12 to include SIL1 certification via TUV Rheinland.